

# Magnetic field sensor


## MB-F32-A2-V1



- For mounting on a hydraulic cylinder
- Detects the piston position through the cylinder wall
- Suitable for magnetic, hydraulic cylinders made of steel



### Dimensions

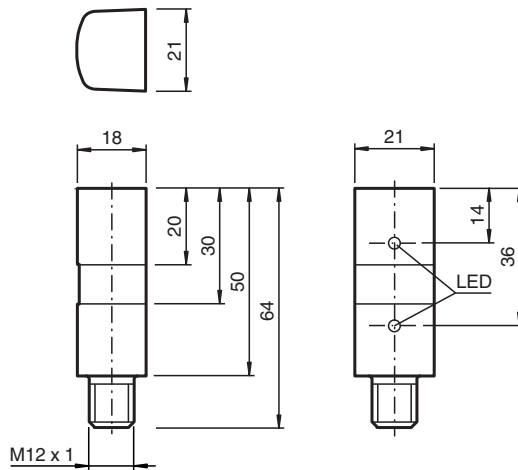

### Technical Data

#### General specifications

|                    |       |  |
|--------------------|-------|--|
| Switching function |       | complementary  |
| Output type        |       | PNP  |
| Connection         |       | Switching output 1 : pin 4<br>Switching output 2 : pin 2 |
| Installation       |       | on the cylinder  |
| Output polarity    |       | DC   |
| Switching range    | $s_b$ | typ. 50 mm   |
| Output type        |       | 4-wire   |

#### Nominal ratings

Release date: 2023-01-25 Date of issue: 2023-01-26 Filename: 040812\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS


## Technical Data

|   |       |  |
|---|-------|--|
| Operating voltage                               | $U_B$ | 10 ... 30 V DC   |
| Reverse polarity protection                     |       | reverse polarity protected   |
| Short-circuit protection                        |       | pulsing  |
| Voltage drop                                    | $U_d$ | $\leq 1.5$ V   |
| Operating current                               | $I_L$ | 0 ... 100 mA   |
| No-load supply current                          | $I_0$ | $\leq 30$ mA   |
| <b>Functional safety related parameters</b>     |       |  |
| MTTF <sub>d</sub>                               |       | 739 a  |
| Mission Time (T <sub>M</sub> )                  |       | 20 a   |
| Diagnostic Coverage (DC)                        |       | 0 %  |
| <b>Indicators/operating means</b>               |       |  |
| LED indication                                  |       | red: switching state output 1<br>yellow: switching state output 2  |
| <b>Compliance with standards and directives</b> |       |  |
| Standard conformity                             |       |  |
| Standards                                       |       | EN 60947-5-2:2007<br>IEC 60947-5-2:2007                            |
| <b>Approvals and certificates</b>               |       |  |
| CCC approval                                    |       | CCC approval / marking not required for products rated $\leq 36$ V |
| <b>Ambient conditions</b>                       |       |  |
| Ambient temperature                             |       | -25 ... 85 °C (-13 ... 185 °F)                                     |
| Storage temperature                             |       | -40 ... 85 °C (-40 ... 185 °F)                                     |
| <b>Mechanical specifications</b>                |       |  |
| Connection type                                 |       | Connector plug M12 x 1 , 4-pin                                     |
| Housing material                                |       | Polyamide (PA)   |
| Sensing face                                    |       | Polyamide (PA)   |
| Degree of protection                            |       | IP67   |

## Connection



## Connection Assignment




Wire colors in accordance with EN 60947-5-2

|   |    |         |
|---|----|---------|
| 1 | BN | (brown) |
| 2 | WH | (white) |
| 3 | BU | (blue)  |
| 4 | BK | (black) |

**Additional Information**

**Magnetic System**

Primary Construction of the Magnetic System

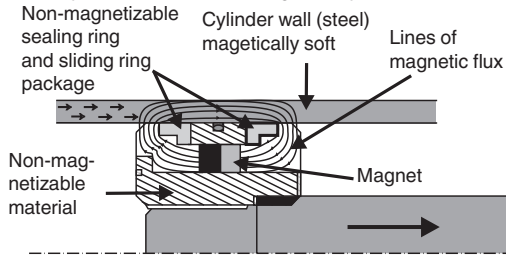


For this sensor principle it is not sufficient to simply mount the permanent magnet onto the piston. A magnetic system has to be constructed which conducts the magnetic flux of the permanent magnets directly into the cylinder wall in order to achieve the strongest possible magnetization. For further details regarding the construction of magnetic systems, refer to the manual. A field trial is generally recommended before practical operation!

**Magnets**

The magnets are axially magnetized. It must be ensured that all magnets are mounted with the same polarity!

**Definition of polarity**

An approaching permanent magnet with the north pole pointing towards the cable connection of the sensor causes output 1 to respond and the red LED to light.



**Antivalent output**

By means of the sensor's antivalent output stage the appropriate output can be chosen depending on the polarity of the magnetic system or the mounting location of the sensor

**Mounting**

The sensor is mounted directly on the surface towards the cylinder axis. For this purpose, pressure bands, tightening straps, or hose band clamps can be used.

**Accessories**

|  |                    |   |
|--|--------------------|---|
|  | <b>V1-W-2M-PUR</b> | Female cordset single-ended M12 angled A-coded, 4-pin, PUR cable grey   |
|  | <b>V1-G-2M-PUR</b> | Female cordset single-ended M12 straight A-coded, 4-pin, PUR cable grey |

Release date: 2023-01-25 Date of issue: 2023-01-26 Filename: 040812\_eng.pdf