

IMI

Rugged full metal sensors for use in challenging applications

SICK
Sensor Intelligence.

Advantages



Very long service life

The housing including sensing face of the IMI inductive proximity sensors consists completely of high-strength stainless steel and the sensors have protection class IP68 or IP69K. The stable, leak-free sensors are an extremely rugged solution for challenging applications. This reduces downtimes and ensures very long service life.



Closed stainless-steel housing



Cleaning with brushes possible



Resistant to mechanical loads, such as shocks



Rugged solution for any challenging applications thanks to closed housing




Large sensing ranges and IO-Link for stable processes and high plant availability

The larger the sensing range, the greater the operating reserves. The operating reserves in turn mean stable processes and high plant availability. The IMI offers two to three times the sensing ranges compared to normative requirements. These sensing ranges ensure maximum performance in their processes. The IMI is also equipped with IO-Link. The sensor detects the actual operational statuses and automatically provides the data to the process control. This means transparency down to the lowest field level so that your plant does not go into a standstill.



Transparency down to the lowest field level

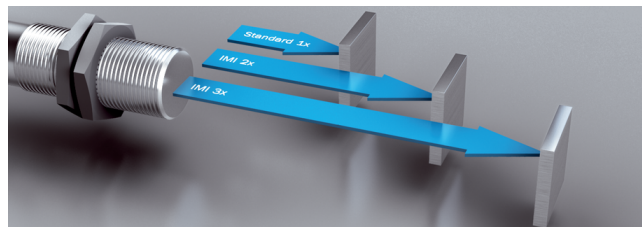

Thanks to the three-fold sensing range up to 40 mm, the IMI inductive proximity sensors offer large operating reserves.



Stable processes and high plant availability thanks to large sensing ranges and IO-Link#



Quick and safe installation

The IMI can be installed quickly and easily, saving you valuable time. The supplied self-locking nuts facilitate mounting and ensure the sensors stay permanently attached. The IMI is equipped with a so-called visual adjustment indicator: The LED status change from flashing to steadily lit LED signalizes when the secured sensing range has been reached. This ensures the target object is detected throughout the entire temperature range. The unique and systematic type designation is affixed to the sensor so that it remains clearly visible.



Visual adjustment indicator: The LED signalizes when the secured sensing range has been reached



Self-locking stainless steel nuts are included with delivery for this purpose



Clearly visible laser marking in the long-term



Thanks to the visual adjustment indicator and self-locking nuts, installation of IMI sensors is quick and easy.



Flexible and cost-optimized application solutions

Full metal sensors are particularly well-suited for use in machine tools in the pharmaceutical, food and beverage industry. The IMI comes in different stainless steel versions: Rugged V2A stainless-steel housing for machine tool applications and food-safe V4A stainless-steel housing for hygienic and wet area applications. The complete portfolio of these full metal sensors makes it possible for you to solve the application flexibly and at optimal cost. Have you not found the right sensor for your application? We would be happy to implement your special wishes - precisely tailored to your requirements.



Optimized down to the last detail for machine tool applications or applications in the pharmaceutical, food and beverage industry.



Technical data overview

| | |
|------------------------------------|---|
| Housing | Cylindrical thread design |
| Thread size | M8 x 1 M12 x 1 M18 x 1 M30 x 1.5 |
| Diameter | Ø 8 mm ... Ø 30 mm (depending on type) |
| Sensing range S_n | 2 mm ... 40 mm (depending on type) |
| Housing material | Stainless steel V2A / Stainless steel V4A (depending on type) |
| Enclosure rating | IP68, IP69K |

Product description

In contrast to conventional proximity sensors, whose sensing face consists of plastic, the IMI inductive proximity sensors have a closed housing made completely of stainless steel. This feature makes the IMI ideal for use in challenging applications with mechanical and chemical loads, for instance shocks, quick temperature changes, daily cleaning with aggressive media, the effect of cooling lubricants. In addition, the IMI offers large sensing ranges and IO-Link communication. This ensure process stability and high plant availability as well as flexible and cost-optimized implementation of application solutions.

At a glance

- Types: M8 to M30
- Large sensing ranges: 2 mm to 40 mm
- Enclosure rating: IP68, IP69K
- Temperature range: -25 °C to +85 °C
- Option of rugged housing or housing suitable for the food industry made completely out of stainless steel
- IO-Link and visual adjustment indicator
- Resistant against oils, cooling lubricants and cleaning products

Your benefits

- Very long service life due to closed stainless-steel housing, resistance to oils, cooling lubricants and cleaning products
- Large sensing ranges and IO-Link for stable processes and high plant availability
- Quick and easy installation thanks to visual adjustment indicator and self-locking nuts
- Flexible and cost-optimized implementation of application solutions thanks to large product portfolio
- Easy implementation of special customer-specific variants

Fields of application

- Query of coupling bend position in storage tanks
- Position monitoring for conveying lines in the food industry
- Position monitoring of globe valves
- Metal detection on transport belts in press shops
- Position detection of tools in automatic tool changers

Ordering information

Other models and accessories → www.sick.com/IMI

- **Sub product family:** IM08
- **Cylindrical thread design:** M8
- **Installation type:** flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 3 mm

| Switching output | Output function | Special features | Connection type | Type | Part no. |
|------------------|-----------------|--|---------------------|----------------|----------|
| PNP | NO | Sensing face made of stainless steel V2A, Resistant against coolant lubricants, triple sensing range, Visual adjustment indicator, IO-Link | Connector M8, 3-pin | IM08-03BPS-VT1 | 6068715 |

- **Sub product family:** IM08
- **Cylindrical thread design:** M8
- **Installation type:** non-flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 6 mm

| Switching output | Output function | Special features | Connection type | Type | Part no. |
|------------------|-----------------|--|---------------------|----------------|----------|
| PNP | NO | Sensing face made of stainless steel V2A, Resistant against coolant lubricants, triple sensing range, Visual adjustment indicator, IO-Link | Connector M8, 3-pin | IM08-06NPS-VT1 | 6068716 |

- **Sub product family:** IMI08
- **Cylindrical thread design:** M8
- **Installation type:** flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 2 mm

| Switching output | Output function | Special features | Connection type | Type | Part no. |
|------------------|-----------------|--|---------------------------|-----------------|----------|
| NPN | NC | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Connector M8, 3-pin | IMI08-02BNOVT0S | 1093884 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Male connector M12, 4-pin | IMI08-02BNONCOS | 1093888 |
| | NO | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Connector M8, 3-pin | IMI08-02BNSVT0S | 1093883 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Male connector M12, 4-pin | IMI08-02BNSNCOS | 1093887 |

| Switching output | Output function | Special features | Connection type | Type | Part no. |
|------------------|-----------------|--|---------------------------|-----------------|----------|
| PNP | NC | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Connector M8, 3-pin | IMI08-02BPOVT0S | 1093882 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Male connector M12, 4-pin | IMI08-02BPONC0S | 1093886 |
| | NO | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Connector M8, 3-pin | IMI08-02BPSVT0S | 1093857 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Male connector M12, 4-pin | IMI08-02BPSNC0S | 1093885 |

- **Sub product family:** IM12
- **Cylindrical thread design:** M12
- **Installation type:** flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 6 mm
- **Connection type:** male connector M12, 4-pin

| Switching output | Output function | Special features | Type | Part no. |
|------------------|-----------------|--|----------------|----------|
| NPN | NO | Sensing face made of stainless steel V4A, Resistant to cleaning agents, triple sensing range, Visual adjustment indicator | IM12-06BNS-NC1 | 6027573 |
| PNP | NC | | IM12-06BPO-NC1 | 6027574 |
| | NO | Sensing face made of stainless steel V2A, Resistant against coolant lubricants, triple sensing range, Visual adjustment indicator, IO-Link | IM12-06BPS-VC1 | 6068718 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents, triple sensing range, Visual adjustment indicator, IO-Link | IM12-06BPS-NC1 | 6027572 |

- **Sub product family:** IM12
- **Cylindrical thread design:** M12
- **Installation type:** non-flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 10 mm
- **Output function:** NO
- **Connection type:** male connector M12, 4-pin

| Switching output | Special features | Type | Part no. |
|------------------|---|----------------|----------|
| NPN | Sensing face made of stainless steel V4A, Resistant to cleaning agents, triple sensing range, Visual adjustment indicator | IM12-10NNS-NC1 | 6027576 |

| Switching output | Special features | Type | Part no. |
|------------------|--|-----------------|----------|
| PNP | Sensing face made of stainless steel V2A, Resistant against coolant lubricants, triple sensing range, Visual adjustment indicator, IO-Link | IMI12-10NPS-VC1 | 6068719 |
| | Sensing face made of stainless steel V4A, Resistant to cleaning agents, triple sensing range, Visual adjustment indicator, IO-Link | IMI12-10NPS-NC1 | 6027575 |

- **Sub product family:** IMI12
- **Cylindrical thread design:** M12
- **Installation type:** flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 4 mm

| Switching output | Output function | Special features | Connection type | Type | Part no. |
|------------------|-----------------|--|---------------------------|-----------------|----------|
| NPN | NC | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Cable, 3-wire, 2 m | IMI12-04BNOVU2S | 1093896 |
| | | | Male connector M12, 4-pin | IMI12-04BNOVCOS | 1093892 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Cable, 3-wire, 2 m | IMI12-04BNONU2S | 1093922 |
| | | | Male connector M12, 4-pin | IMI12-04BNONCOS | 1093918 |
| | NO | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Cable, 3-wire, 2 m | IMI12-04BNSVU2S | 1093895 |
| | | | Male connector M12, 4-pin | IMI12-04BNSVCOS | 1093891 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Cable, 3-wire, 2 m | IMI12-04BNSNU2S | 1093921 |
| | | | Male connector M12, 4-pin | IMI12-04BNSNCOS | 1093917 |
| PNP | NC | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Cable, 3-wire, 2 m | IMI12-04BPOVU2S | 1093894 |
| | | | Male connector M12, 4-pin | IMI12-04BPOVCOS | 1093890 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Cable, 3-wire, 2 m | IMI12-04BPONU2S | 1093920 |
| | | | Male connector M12, 4-pin | IMI12-04BPONCOS | 1093916 |
| | NO | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Cable, 3-wire, 2 m | IMI12-04BPSVU2S | 1093893 |
| | | | Male connector M12, 4-pin | IMI12-04BPSVCOS | 1093889 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Cable, 3-wire, 2 m | IMI12-04BPSNU2S | 1093919 |
| | | | Male connector M12, 4-pin | IMI12-04BPSNCOS | 1093915 |

- **Sub product family:** IM18
- **Cylindrical thread design:** M18
- **Installation type:** flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 10 mm
- **Connection type:** male connector M12, 4-pin

| Switching output | Output function | Special features | Type | Part no. |
|------------------|-----------------|--|----------------|----------|
| NPN | NO | Sensing face made of stainless steel V4A, Resistant to cleaning agents, triple sensing range, Visual adjustment indicator | IM18-10BNS-NC1 | 6027578 |
| PNP | NC | | IM18-10BPO-NC1 | 6027579 |
| PNP | NO | Sensing face made of stainless steel V2A, Resistant against coolant lubricants, triple sensing range, Visual adjustment indicator, IO-Link | IM18-10BPS-VC1 | 6068720 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents, triple sensing range, Visual adjustment indicator, IO-Link | IM18-10BPS-NC1 | 6027577 |

- **Sub product family:** IM18
- **Cylindrical thread design:** M18
- **Installation type:** non-flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 20 mm
- **Output function:** NO
- **Connection type:** male connector M12, 4-pin

| Switching output | Special features | Type | Part no. |
|------------------|--|----------------|----------|
| NPN | Sensing face made of stainless steel V4A, Resistant to cleaning agents, triple sensing range, Visual adjustment indicator | IM18-20NNS-NC1 | 6027581 |
| PNP | Sensing face made of stainless steel V2A, Resistant against coolant lubricants, triple sensing range, Visual adjustment indicator, IO-Link | IM18-20NPS-VC1 | 6068721 |
| | Sensing face made of stainless steel V4A, Resistant to cleaning agents, triple sensing range, Visual adjustment indicator, IO-Link | IM18-20NPS-NC1 | 6027580 |

- **Sub product family:** IMI18
- **Cylindrical thread design:** M18
- **Installation type:** flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 8 mm

| Switching output | Output function | Special features | Connection type | Type | Part no. |
|------------------|-----------------|--|---------------------------|-----------------|----------|
| NPN | NC | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Cable, 3-wire, 2 m | IMI18-08BNOVU2S | 1093930 |
| | | | Male connector M12, 4-pin | IMI18-08BNOVCOS | 1093926 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Cable, 3-wire, 2 m | IMI18-08BNONU2S | 1093938 |
| | | | Male connector M12, 4-pin | IMI18-08BNONCOS | 1093934 |
| | NO | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Cable, 3-wire, 2 m | IMI18-08BNSVU2S | 1093929 |
| | | | Male connector M12, 4-pin | IMI18-08BNSVCOS | 1093925 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Cable, 3-wire, 2 m | IMI18-08BNSNU2S | 1093937 |
| | | | Male connector M12, 4-pin | IMI18-08BNSNCOS | 1093933 |
| PNP | NC | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Cable, 3-wire, 2 m | IMI18-08BPOVU2S | 1093928 |
| | | | Male connector M12, 4-pin | IMI18-08BPOVCOS | 1093924 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Cable, 3-wire, 2 m | IMI18-08BPONU2S | 1093936 |
| | | | Male connector M12, 4-pin | IMI18-08BPONCOS | 1093932 |
| | NO | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Cable, 3-wire, 2 m | IMI18-08BPSVU2S | 1093927 |
| | | | Male connector M12, 4-pin | IMI18-08BPSVCOS | 1093923 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Cable, 3-wire, 2 m | IMI18-08BPSNU2S | 1093935 |
| | | | Male connector M12, 4-pin | IMI18-08BPSNCOS | 1093931 |

- **Sub product family:** IM30
- **Cylindrical thread design:** M30
- **Installation type:** flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 20 mm
- **Output function:** NO
- **Connection type:** male connector M12, 4-pin

| Switching output | Special features | Type | Part no. |
|------------------|--|----------------|----------|
| NPN | Sensing face made of stainless steel V4A, Resistant to cleaning agents, triple sensing range, Visual adjustment indicator | IM30-20BNS-NC1 | 6027583 |
| PNP | Sensing face made of stainless steel V2A, Resistant against coolant lubricants, triple sensing range, Visual adjustment indicator, IO-Link | IM30-20BPS-VC1 | 6068722 |
| | Sensing face made of stainless steel V4A, Resistant to cleaning agents, triple sensing range, Visual adjustment indicator, IO-Link | IM30-20BPS-NC1 | 6027582 |

- **Sub product family:** IM30
- **Cylindrical thread design:** M30
- **Installation type:** non-flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 40 mm
- **Output function:** NO
- **Connection type:** male connector M12, 4-pin

| Switching output | Special features | Type | Part no. |
|------------------|--|----------------|----------|
| NPN | Sensing face made of stainless steel V4A, Resistant to cleaning agents, triple sensing range, Visual adjustment indicator | IM30-40NNS-NC1 | 6027585 |
| PNP | Sensing face made of stainless steel V2A, Resistant against coolant lubricants, triple sensing range, Visual adjustment indicator, IO-Link | IM30-40NPS-VC1 | 6068723 |
| | Sensing face made of stainless steel V4A, Resistant to cleaning agents, triple sensing range, Visual adjustment indicator, IO-Link | IM30-40NPS-NC1 | 6027584 |

- **Sub product family:** IMI30
- **Cylindrical thread design:** M30
- **Installation type:** flush
- **Electrical wiring:** DC 3-wire
- **Sensing range S_n :** 10 mm

| Switching output | Output function | Special features | Connection type | Type | Part no. |
|------------------|-----------------|--|---------------------------|-----------------|----------|
| NPN | NC | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Cable, 3-wire, 2 m | IMI30-10BNOVU2S | 1093946 |
| | | | Male connector M12, 4-pin | IMI30-10BNOVC0S | 1093942 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Cable, 3-wire, 2 m | IMI30-10BNONU2S | 1093955 |
| | | | Male connector M12, 4-pin | IMI30-10BNONC0S | 1093950 |
| | NO | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Cable, 3-wire, 2 m | IMI30-10BNSVU2S | 1093945 |
| | | | Male connector M12, 4-pin | IMI30-10BNSVC0S | 1093941 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Cable, 3-wire, 2 m | IMI30-10BNSNU2S | 1093954 |
| | | | Male connector M12, 4-pin | IMI30-10BNSNC0S | 1093949 |
| PNP | NC | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Cable, 3-wire, 2 m | IMI30-10BPOVU2S | 1093944 |
| | | | Male connector M12, 4-pin | IMI30-10BP0VC0S | 1093940 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Cable, 3-wire, 2 m | IMI30-10BPONU2S | 1093953 |
| | | | Male connector M12, 4-pin | IMI30-10BP0NC0S | 1093948 |
| | NO | Sensing face made of stainless steel V2A, Resistant against coolant lubricants | Cable, 3-wire, 2 m | IMI30-10BPSVU2S | 1093943 |
| | | | Male connector M12, 4-pin | IMI30-10BPSVC0S | 1093939 |
| | | Sensing face made of stainless steel V4A, Resistant to cleaning agents | Cable, 3-wire, 2 m | IMI30-10BPSNU2S | 1093951 |
| | | | Male connector M12, 4-pin | IMI30-10BPSNC0S | 1093947 |

SICK AT A GLANCE

SICK is one of the leading manufacturers of intelligent sensors and sensor solutions for industrial applications. A unique range of products and services creates the perfect basis for controlling processes securely and efficiently, protecting individuals from accidents and preventing damage to the environment.

We have extensive experience in a wide range of industries and understand their processes and requirements. With intelligent sensors, we can deliver exactly what our customers need. In application centers in Europe, Asia and North America, system solutions are tested and optimized in accordance with customer specifications. All this makes us a reliable supplier and development partner.

Comprehensive services complete our offering: SICK LifeTime Services provide support throughout the machine life cycle and ensure safety and productivity.

For us, that is “Sensor Intelligence.”

WORLDWIDE PRESENCE:

Contacts and other locations –www.sick.com